


Außenbewattgebiet - Differenzmodell 1999/2002

Übersicht

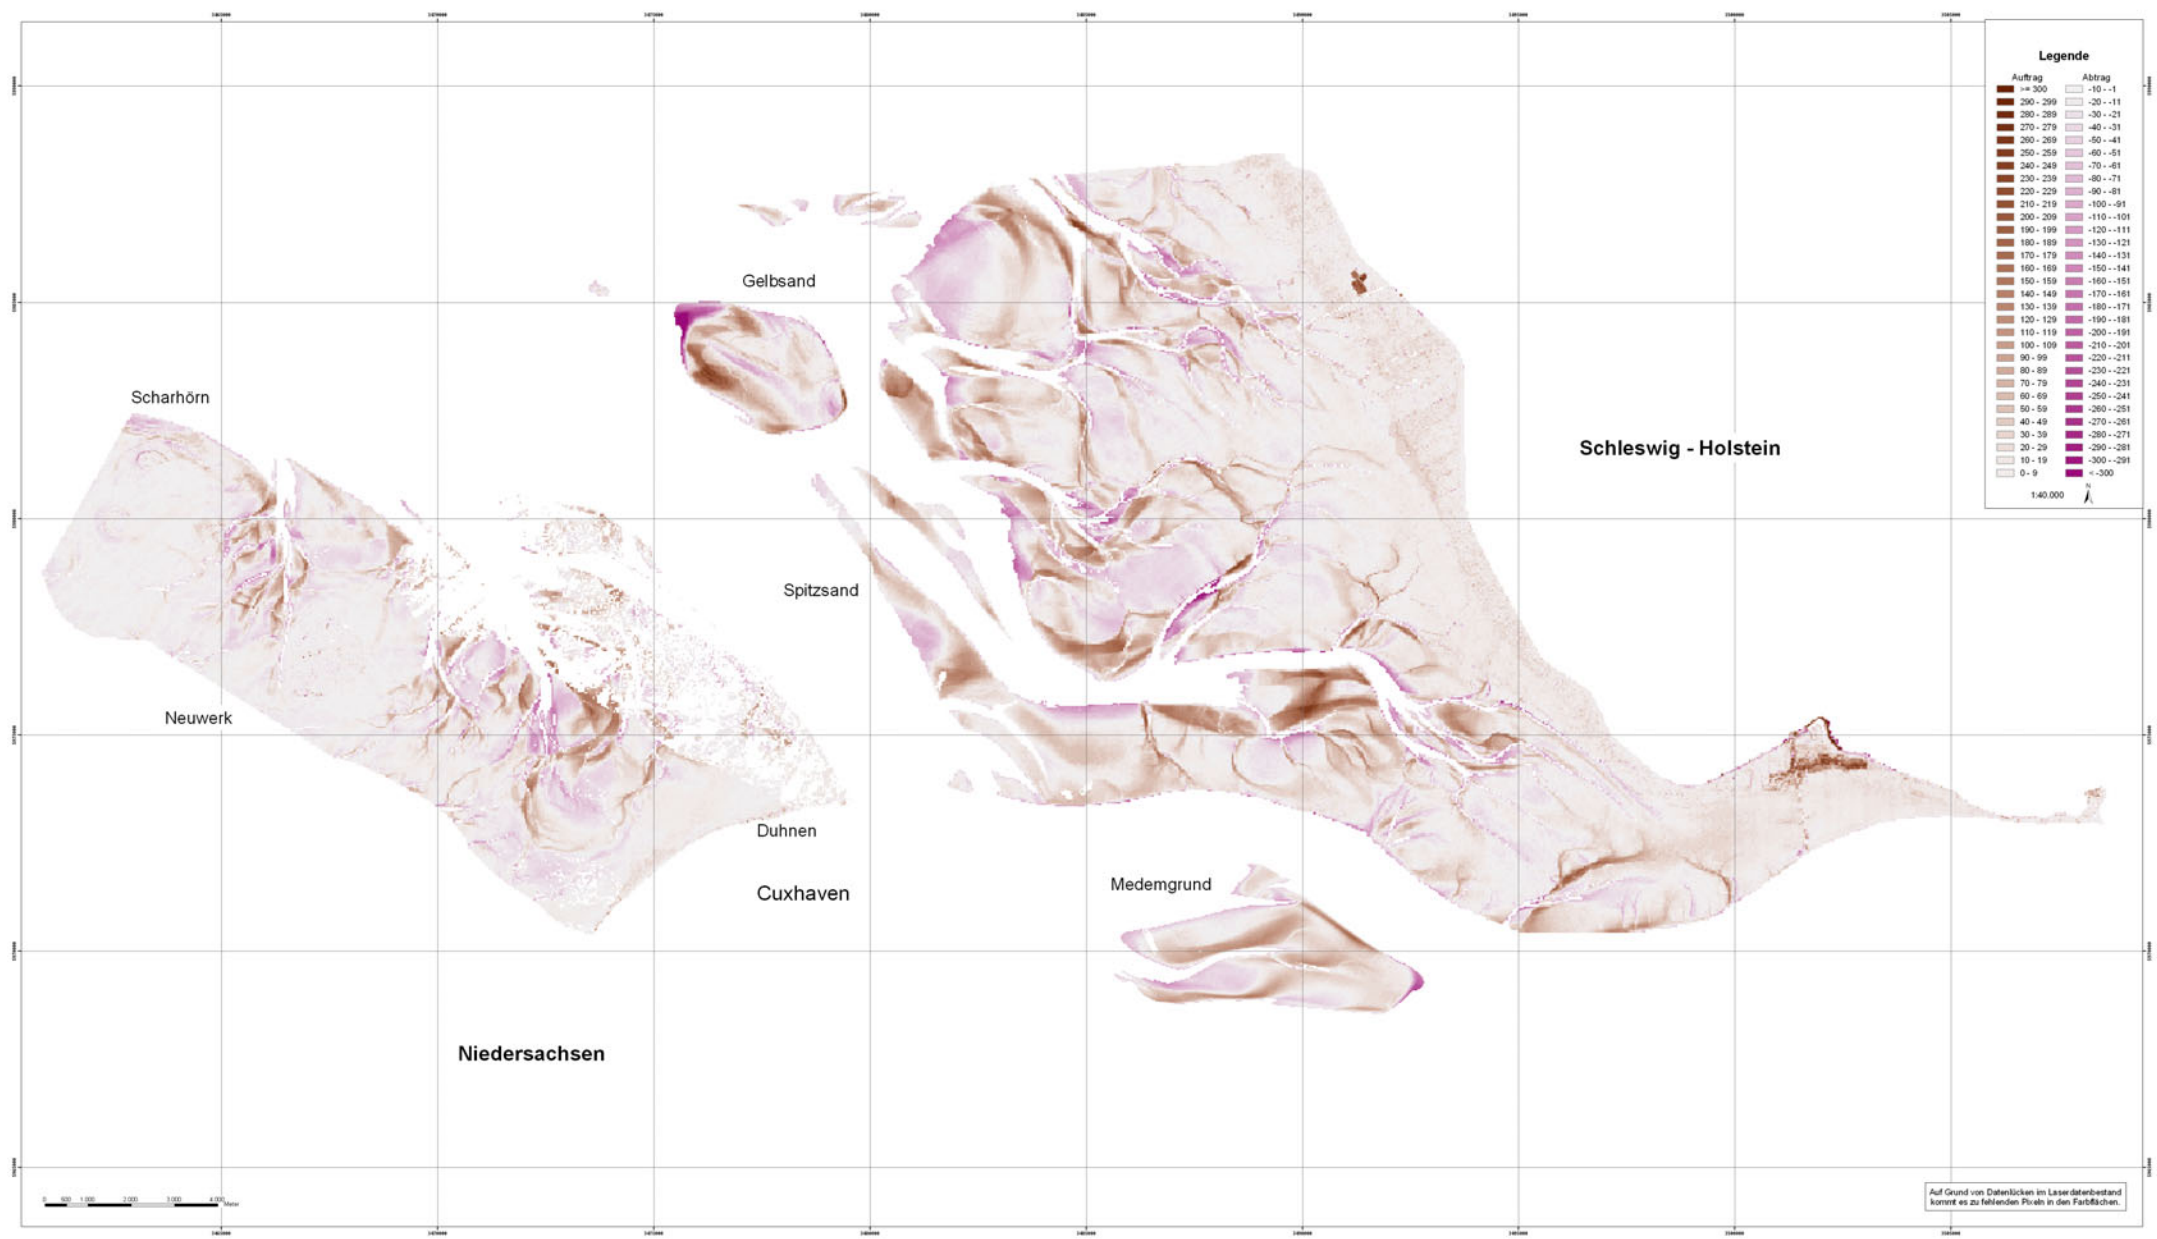

Legende

| Auftrag | Abtrag |
|-----------|-------------|
| >= 300 | -10 - -1 |
| 290 - 299 | -20 - -11 |
| 280 - 289 | -30 - -21 |
| 270 - 279 | -40 - -31 |
| 260 - 269 | -50 - -41 |
| 250 - 259 | -60 - -51 |
| 240 - 249 | -70 - -61 |
| 230 - 239 | -80 - -71 |
| 220 - 229 | -90 - -81 |
| 210 - 219 | -100 - -91 |
| 200 - 209 | -110 - -101 |
| 190 - 199 | -120 - -111 |
| 180 - 189 | -130 - -121 |
| 170 - 179 | -140 - -131 |
| 160 - 169 | -150 - -141 |
| 150 - 159 | -160 - -151 |
| 140 - 149 | -170 - -161 |
| 130 - 139 | -180 - -171 |
| 120 - 129 | -190 - -181 |
| 110 - 119 | -200 - -191 |
| 100 - 109 | -210 - -201 |
| 90 - 99 | -220 - -211 |
| 80 - 89 | -230 - -221 |
| 70 - 79 | -240 - -231 |
| 60 - 69 | -250 - -241 |
| 50 - 59 | -260 - -251 |
| 40 - 49 | -270 - -261 |
| 30 - 39 | -280 - -271 |
| 20 - 29 | -290 - -281 |
| 10 - 19 | -300 - -291 |
| 0 - 9 | < -300 |

1:40.000

Datengrundlage:
Laserscannerbefliegungen 1999 und 2002

Hansa Luftbild Geoinformationssysteme GmbH
Münster, April 2004